



- Warning**
- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
 - Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
 - Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.
- If you have any enquiries, please contact your local importer, distributor and/or retailer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.



Split Type Air Conditioners

DC Inverter Power Control

Cooling Only & Heat Pump [50 Hz] **R-410A** **R-22**

CAUTION!

This Original Content of Catalogue is a prototype of official Catalogue.

It cannot be disclosed to any outside party as sales promotional materials.

To turn the Original Content into practical sales promotional materials, at least the following two points should be modified.

1. The local sales company name should be put on the back cover.
2. “aprv” at the end of Catalogue ID number should be deleted.



Less Energy, More Comfort

If you think you have to choose between energy savings and personal comfort, just try DC Inverter. Thanks to their variable operating capacities, these units raise comfort levels and, at the same time, increase energy savings. Enjoy more comfort with less energy!




New Lineup

Daikin has launched new R-22 2.5 to 7.1 kW models, helping you to choose just the right capacity for each room size. The 2.5 and 3.5 kW heat-pump models also feature a new design.



FTXD25/35H

NEW Heat-pump type only
NEW

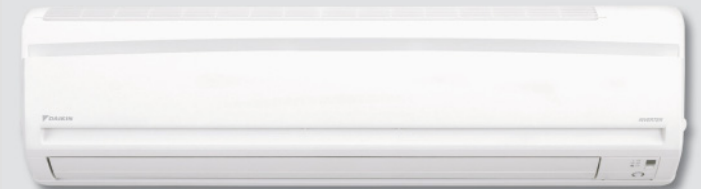


FTXD50/60/71H

NEW

Energy Savings


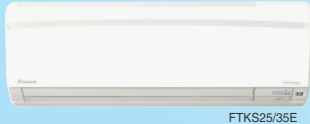
The DC Inverter series features the Reluctance DC motor for compressors and DC motor for fans. This hi-tech energy-saving package is completed by Daikin's advanced swing compressor and PAM control. The FTXS25E achieves a COP of 4.17, 48% higher than conventional models. This is the result of upgrading from conventional AC inverter to advanced DC Inverter technology.

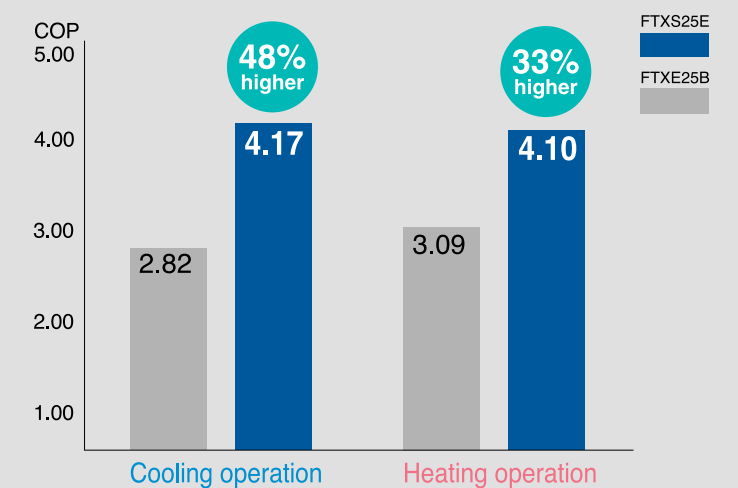

Note: **NEW** indicates a new capacity model. **NEW** indicates a new design model.

Inverter Air Conditioners with a Total of 21 Models for Cooling Only and Heat Pump

R-410A Cooling Only FTKS series






FTKS25/35E

RKS25/35EB

Model	FTKS25EVMV / RKS25EBVMV	
Cooling kW	2.5 (1.2-3.0)	
Capacity Btu/h	8,500 (4,100-10,200)	

Model	FTKS35EVMV / RKS35EBVMV	
Cooling kW	3.5 (1.2-3.8)	
Capacity Btu/h	11,900 (4,100-12,950)	

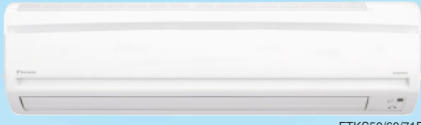

FTKS50/60/71F

RKS50/60F


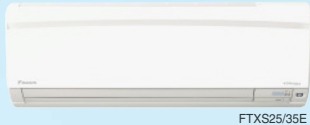
RKS71F

Model	FTKS50FVMV / RKS50FVMV	
Cooling kW	5.0 (1.7-6.0)	
Capacity Btu/h	17,100 (5,800-20,500)	

Model	FTKS60FVMV / RKS60FVMV	
Cooling kW	6.0 (1.7-6.7)	
Capacity Btu/h	20,500 (5,800-22,900)	

Model	FTKS71FVMV / RKS71FVMV	
Cooling kW	7.1 (2.3-8.5)	
Capacity Btu/h	24,200 (7,800-29,000)	

R-410A Heat Pump FTXS series






FTXS25/35E

RXS25/35EB

Model	FTXS25EVMV / RXS25EBVMV	
Cooling kW	2.5 (1.2-3.0)	
Capacity Btu/h	8,500 (4,100-10,200)	
Heating kW	3.4 (1.2-4.5)	
Capacity Btu/h	11,600 (4,100-15,350)	

Model	FTXS35EVMV / RXS35EBVMV	
Cooling kW	3.5 (1.2-3.8)	
Capacity Btu/h	11,900 (4,100-12,950)	
Heating kW	4.0 (1.2-5.0)	
Capacity Btu/h	13,600 (4,100-17,050)	



FTXS50/60/71F

RXS50/60F

RXS71F

Model	FTXS50FVMV / RXS50FVMV	
Cooling kW	5.0 (1.7-6.0)	
Capacity Btu/h	17,100 (5,800-20,500)	
Heating kW	5.8 (1.7-7.7)	
Capacity Btu/h	19,800 (5,800-26,300)	

Model	FTXS60FVMV / RXS60FVMV	
Cooling kW	6.0 (1.7-6.7)	
Capacity Btu/h	20,500 (5,800-22,900)	
Heating kW	7.0 (1.7-8.0)	
Capacity Btu/h	23,900 (5,800-27,300)	

Model	FTXS71FVMV / RXS71FVMV	
Cooling kW	7.1 (2.3-8.5)	
Capacity Btu/h	24,200 (7,800-29,000)	
Heating kW	8.2 (2.3-10.0)	
Capacity Btu/h	28,000 (7,900-34,100)	

R-22 Cooling Only FTKD series



FTKD25/35H

RKD25/35H

Model	FTKD25HVMV / RKD25HVMV	
Cooling kW	2.5 (1.2-3.2)	
Capacity Btu/h	8,500 (4,050-10,900)	

Model	FTKD35HVMV / RKD35HVMV	
Cooling kW	3.2 (1.4-4.0)	
Capacity Btu/h	10,900 (4,750-13,650)	



FTKD42/50/60/71H

RKD42H

RKD50/60/71H


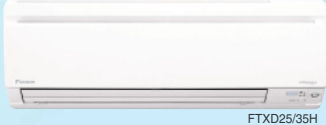
Model	FTKD42HVMV / RKD42HVMV	
Cooling kW	4.2 (2.0-5.0)	
Capacity Btu/h	14,300 (6,800-17,100)	

Model	FTKD50HVMV / RKD50HVMV	
Cooling kW	5.2 (1.5-5.9)	
Capacity Btu/h	17,700 (5,100-20,100)	

Model	FTKD60HVMV / RKD60HVMV	
Cooling kW	6.2 (1.5-6.5)	
Capacity Btu/h	21,200 (5,100-22,200)	

Model	FTKD71HVMV / RKD71HVMV	
Cooling kW	7.1 (2.1-7.6)	
Capacity Btu/h	24,200 (7,200-25,900)	

R-22 Heat Pump FTXD series


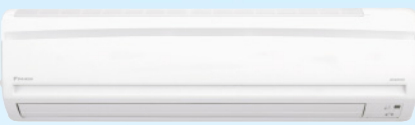


FTXD25/35H

RXD25/35H

Model	FTXD25HVMV / RXD25HVMV	
Cooling kW	2.5 (1.3-3.0)	
Capacity Btu/h	8,500 (4,400-10,200)	
Heating kW	3.4 (1.3-4.0)	
Capacity Btu/h	11,600 (4,400-13,650)	

Model	FTXD35HVMV / RXD35HVMV	
Cooling kW	3.5 (1.4-3.8)	
Capacity Btu/h	11,900 (4,750-12,950)	
Heating kW	4.2 (1.4-5.0)	
Capacity Btu/h	14,300 (4,750-17,050)	



FTXD50/60/71H












RXD50/60/71H














Model	FTXD50HVMV / RXD50HVMV	
Cooling kW	5.2 (1.5-5.9)	
Capacity Btu/h	17,700 (5,100-20,100)	
Heating kW	6.5 (1.5-8.0)	
Capacity Btu/h	22,200 (5,100-27,300)	

Model	FTXD60HVMV / RXD60HVMV	
Cooling kW	6.2 (2.2-7.6)	
Capacity Btu/h	21,200 (7,500-25,900)	
Heating kW	7.2 (2.2-9.0)	
Capacity Btu/h	24,600 (7,500-30,700)	

Model	FTXD71HVMV / RXD71HVMV	
Cooling kW	7.1 (2.9-8.0)	
Capacity Btu/h	24,200 (9,900-27,300)	
Heating kW	8.5 (2.9-9.7)	
Capacity Btu/h	29,000 (9,900-33,100)	

Note: NEW indicates a new capacity model. NEW indicates a new design model.

		Model name	Capacity range					
			25	35	42	50	60	71
R-410A	Cooling only	FTKS						
R-410A	Heat pump	FTXS						

		Model name	Capacity range					
			25	35	42	50	60	71
<div>R-22</div>	Cooling only	FTKD						
<div>R-22</div>	Heat pump	FTXD						

DC Inverter Power Control with Energy Savings



Inverter Advantages Compared to Non-Inverter

Features of Inverter Technology

An inverter is a device for converting frequency. The technology is used in many home appliances and controls the electric voltage, current and frequency. Inverter air conditioners can vary their cooling/heating capacity by adjusting the power supply frequency of their compressors. In contrast, non-inverter air conditioners have a fixed cooling/heating capacity and can only control the indoor temperature by starting or stopping their compressors. As a result, inverter air conditioners are more energy-saving and comfortable than non-inverter air conditioners.

Powerful

Inverter air conditioners operate at maximum capacity as soon as they start up. As a result, the set temperature can be reached more quickly.


Energy Saving

After the indoor temperature approaches the set temperature, Inverter Control adjusts to low capacity operation to maintain this temperature. This makes inverter models more energy-saving than non-inverter models, which must repeatedly start or stop their compressors to maintain the room temperature.

Comfortable

Inverter air conditioners finely adjust capacity according to changes in the air-conditioning load and the difference between the indoor temperature and set temperature is small. They give higher comfort levels than with non-inverter air conditioners.

Variable Capacity Operation

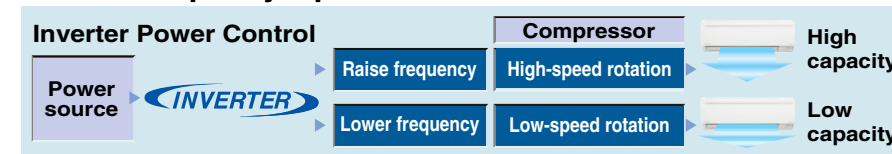


Non-inverter type air conditioner



Inverter air conditioners are able to vary their operating capacity. Non-inverter air conditioners can only operate at a fixed capacity.

Comfortable Temperature Control

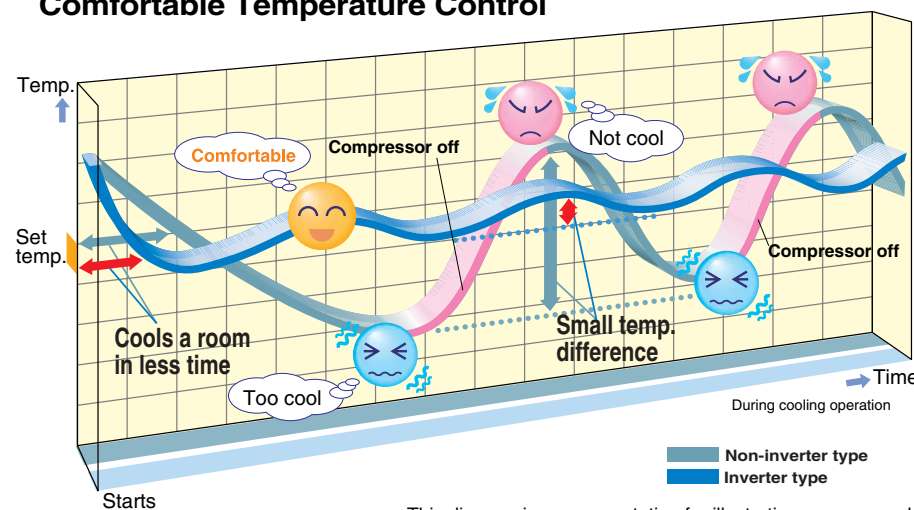


What Is DC Inverter?


Daikin calls an inverter model that is equipped with a DC motor DC Inverter. A DC motor offers higher efficiency than an AC motor. A DC motor uses the power of magnets to attract and repel to generate rotation. A DC motor that is equipped with high-power neodymium magnets, which enable even greater efficiency, is called a Reluctance DC motor.

Energy-Saving Technological Features

Swing Compressor

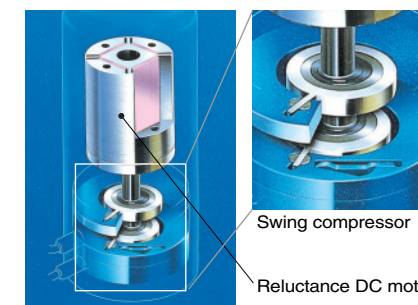


Thanks to its smooth rotation, the swing compressor decreases friction and vibration. It also prevents the leakage of refrigerant gas during compression. These advantages provide quiet and efficient operation.




The swing compressor can reduce operational vibration and sound because its piston moves smoothly inside the compressor.

Reluctance DC Motor for Compressors



Daikin DC Inverter models are equipped with the Reluctance DC motor for compressors. The Reluctance DC motor uses 2 different types of torque, neodymium magnet^{*1} and reluctance torque^{*2}. This motor saves energy by generating more power with a smaller electric current than AC or conventional DC motors. It is more efficient at the low frequencies most commonly used by air conditioners,^{*3} improving efficiency by approximately 20%.


- *1. A neodymium magnet is approximately 10 times stronger than a standard ferrite magnet.
- *2. The torque created by the change in power between the iron and magnet parts.
- *3. The frequency range used by air conditioners during periods of stable operation. This is the range in which air conditioners operate for the longest periods.

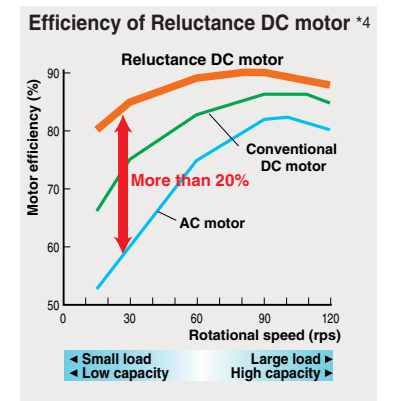

*4. Data are based on studies conducted under controlled conditions at a Daikin laboratory.

DC Motor for Fans

The DC motor allows fine rotation control, which reduces energy consumption. The motor also provides improvements in operational efficiency of up to 40%, compared to an AC motor. These improvements are particularly noticeable in the low-speed range.

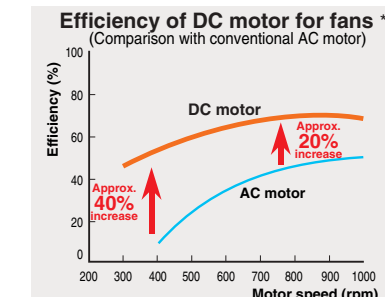

*5. Data are based on studies conducted under controlled conditions at a Daikin laboratory.

PAM Control




PAM (Pulse Amplitude Modulation) control reduces energy loss by controlling how often the converter switches on and off.

Efficient Operation with Less Energy Wastage

Intelligent Eye

Intelligent Eye prevents energy wastage by using its infrared sensor to detect human movement in a room. When there is no movement, Intelligent Eye increases the temperature by 2°C to give energy savings. This reduces energy wastage if, for example, you forget to turn off the air conditioner. This function can be conveniently activated from the remote controller.

Once Intelligent Eye is set, it continues to work to save energy. You do not need to push the SENSOR button each time you wish to use this function.

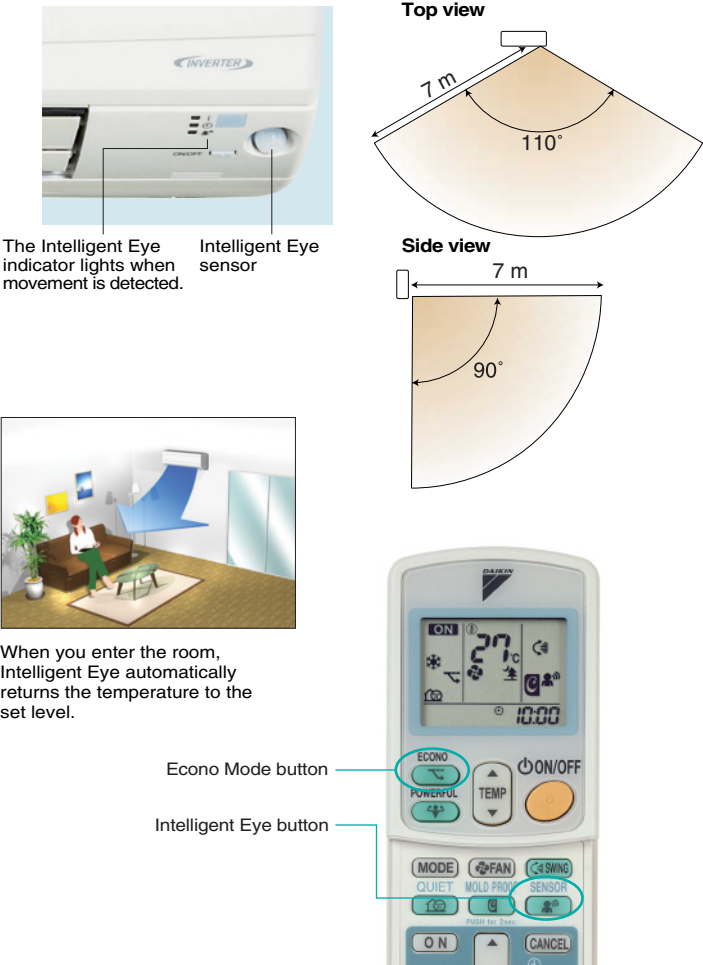


Econo Mode

This function limits both the maximum running current and maximum power consumption. It is particularly effective if the cooling load is high, for example, at start-up or during large gatherings and periods of direct sunshine.


Econo Mode is also useful for preventing circuit breakers from being overloaded during temporary peaks in the running current. The function is easily activated from the remote controller by pushing the ECONO button.


This function is not available for FTKS50/60/71F, FTXS50/60/71F and FTXD50/60/71H.

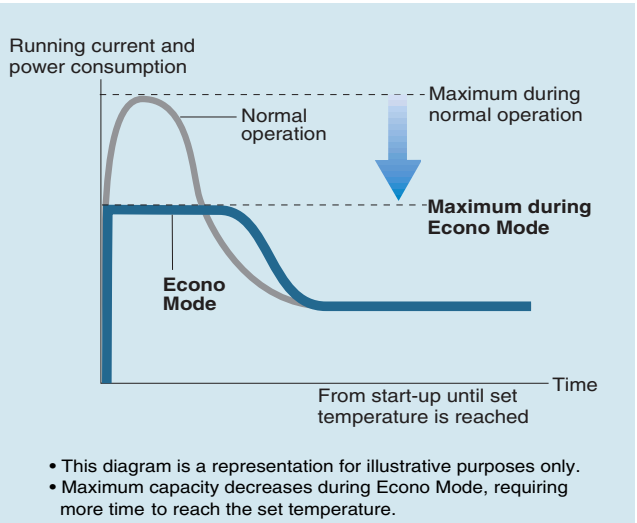






Indoor Unit Quiet Operation

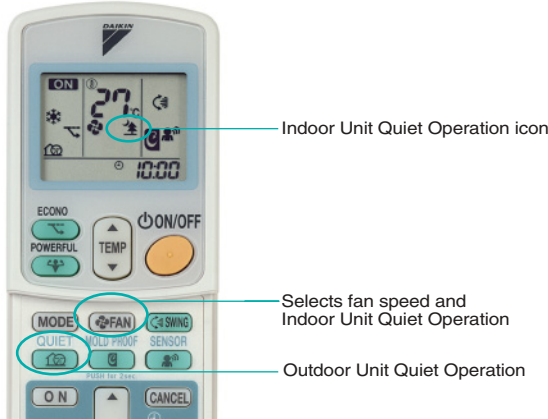This series gives you the choice of 5-step, Quiet or Automatic settings for the fan speed. The Quiet setting selects Indoor Unit Quiet Operation, which decreases the sound pressure level by 3 dB (A) below the Low setting. This wide range of settings allows you to precisely control the fan speed according to your needs. For example, the Quiet function will help you to sleep comfortably at night. The sound pressure level for the FTKS25E is 22 dB (A).

FTKS25E	
Fan speeds	Sound pressure levels
High (H)	37 dB (A)
Low (L)	25 dB (A)
 Quiet (SL)	22 dB (A) ← 3 dB(A)




	Auto	SL	L	M	H
Fan speed					
Sound pressure level		Low ←			High
	Each decrease in airflow volume reduces the sound pressure level.				

Outdoor Unit Quiet Operation

This function decreases the sound pressure level by 3 dB (A) below the rated operation. It provides a low sound pressure level of 43 dB (A) for the RK(X)S25EB. Capacity may decrease when Outdoor Unit Quiet Operation is selected.

RK(X)S25EB	
Operations	Sound pressure levels
Rated (H)	46 dB (A)
Quiet (SL)	43 dB (A) ← 3 dB (A)

22 dB (A) Is So Quiet You Can Even Hear Whispers

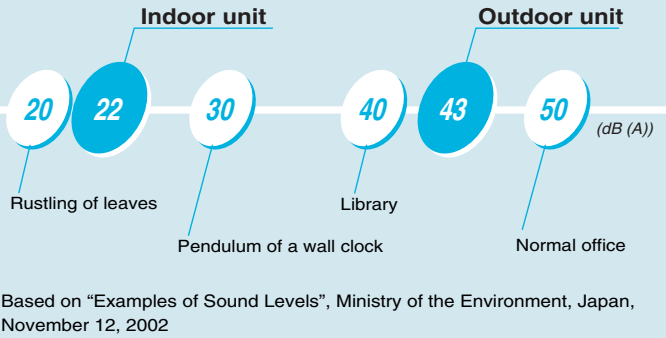

Comfortable Airflow




Power-Airflow Dual Flaps



Wide-Angle Louvers

Power-Airflow Dual Flaps and Wide-Angle Louvers work in tandem to precisely control both vertical and horizontal airflow for distribution of air.

Power-Airflow Dual Flaps




Cooling: the flaps flatten out during operation so that cool air slides off to reach the corner of the room.




Heating: the flaps descend to blow warm air directly down to the floor to quickly warm the whole room.


Wide-Angle Louvers

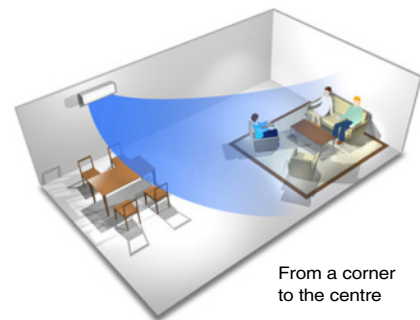

From a corner to the centre

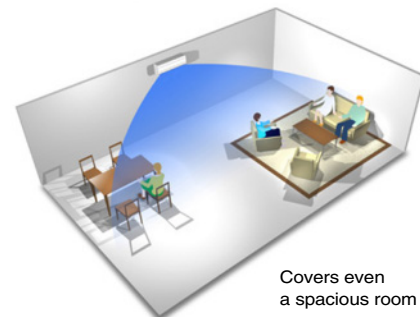

Covers even a spacious room



The louvers can be adjusted by hand for 2.5 and 3.5 kW models and with the wireless remote controller for 4.2 to 7.1 kW models.



Vertical Auto-Swing (up and down)



Horizontal Auto-Swing (left and right)



3-D Airflow

Vertical Auto-Swing automatically moves the flaps up and down and Horizontal Auto-Swing automatically moves the louvers to the left and right. 3-D Airflow combines Vertical and Horizontal Auto-Swing to circulate air to every part of a room for uniform cooling/heating of even large spaces.



Horizontal Auto-Swing and 3-D Airflow are not available for 2.5 and 3.5 kW models.



Comfort Airflow Mode

Comfort Airflow Mode prevents uncomfortable drafts from blowing directly on to your body. With this function, when you press the COMFORT button, the flap moves upward to prevent direct cold drafts.

This function is available for FTKD42/50/60/71H.



Inverter Powerful Operation

Inverter Powerful Operation boosts cooling/heating performance for a 20-minute period. This is convenient both when you first turn on your air conditioner and when you want to quickly change the temperature during operation.



Indoor Unit On/Off Switch

The unit can be conveniently started manually in the event the wireless remote controller is misplaced or the wireless remote controller batteries are not charged.




Indoor Unit On/Off Switch



Night Set Mode

Pressing the Off timer button automatically selects Night Set Mode. This function prevents excessive cooling or heating for a pleasant sleep. Room temperature is raised by 0.5°C after 60 minutes for cooling operation and the temperature is lowered by 2°C after 60 minutes for heating operation.

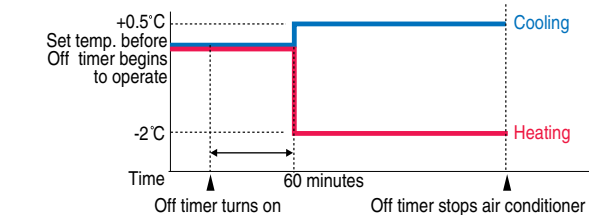

Cooling operation: Room temperature is raised by 0.5°C after 60 minutes.
Heating operation: Room temperature is lowered by 2°C after 60 minutes.






Home Leave Operation

Home Leave Operation prevents large rises or falls in the indoor temperature by continuing operation* while you are sleeping or out of your home. This means that an air-conditioned welcome awaits when you wake or return. It also means that the indoor temperature can quickly return to your favourite comfort setting.

This function is available for FTKS50/60/71F, FTXS50/60/71F and FTXD50/60/71H.

* Home Leave Operation can be set at any temperature from 18 to 32°C for cooling operation and 10 to 30°C for heating operation.

During operation, 23°C for the room temperature setting, and 28°C for the Home Leave setting.

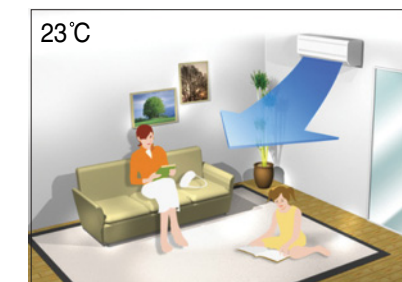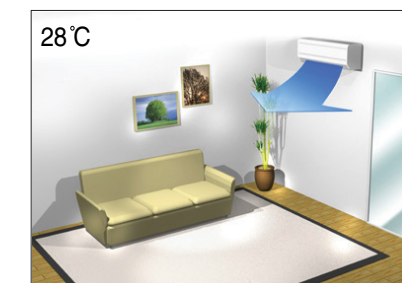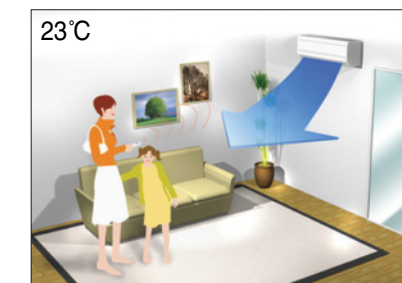

One push!!

Start Home Leave Operation simply by pushing its button on the remote controller.

When you are out of your home, your air conditioner prevents large rises in the indoor temperature by continuing to operate using Home Leave Operation settings.



Push again!!

When you return, you will be greeted by an air-conditioned room. Just push the HOME LEAVE button again to return to your previous settings.


Photocatalytic Air Purifying and Worry Free Design

Titanium Apatite Photocatalytic Air-Purifying Filter

Titanium apatite is a new photocatalytic material with advanced adsorption power. While the filter's micron-level fibres trap dust, this photocatalyst effectively adsorbs and decomposes bacteria. The photocatalyst is activated simply by exposure to light. The filter delivers consistent performance for approximately 3 years if washing with water is performed once every 6 months.




Bacteria removal test
Testing method: Dropping method
Testing organisation: Japan Spinners Inspecting Foundation
Result certificate: No. 012553-1 and 012553-2

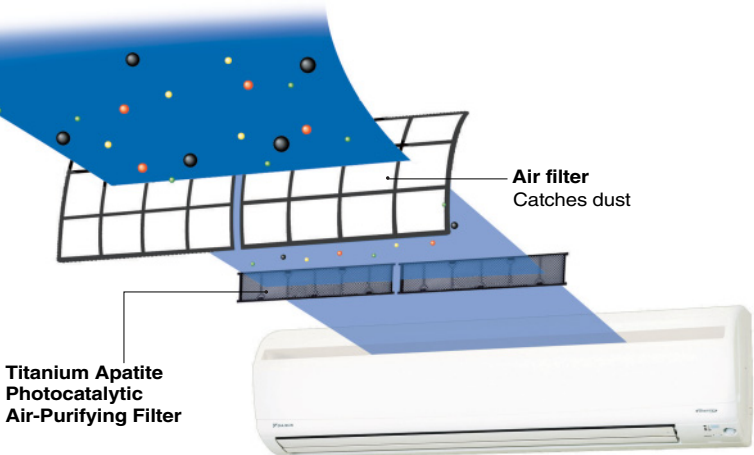

This filter is not a medical device. Benefits such as the adsorption and decomposition of bacteria are only effective for substances that are collected on and in direct contact with the Titanium Apatite Photocatalytic Air-Purifying Filter.

Effect of Titanium Apatite Photocatalyst

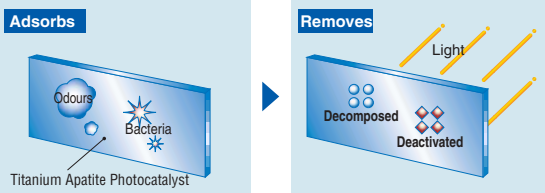

Apatite adsorbs bacteria. At the same time, the photocatalyst oxidises odour components, breaking them down.

Mould-Proof Operation

When cooling or dry operation is stopped, fan-only operation runs automatically for 1 hour. This airflow dries the inside of the indoor unit to reduce the generation of mould and odours.


This function is available for 2.5 and 3.5 kW models.



Wipe-Clean Flat Panel


Flat panel models can be cleaned instantly with a single wipe of a cloth across their smooth surface. If more thorough cleaning is required, the panel can also be easily removed from the unit.

Conventional Front Grille Design

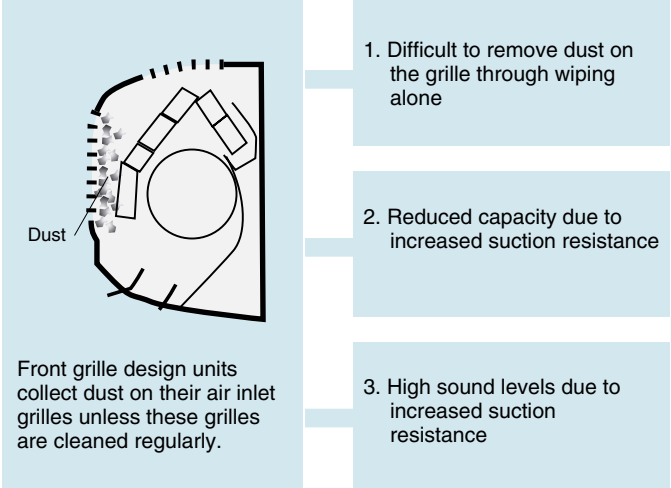

Anticorrosion Treatment of Outdoor Heat Exchanger Fins


The outdoor unit's heat exchanger fins are processed using a special anticorrosion treatment. The surface is covered with a thin acrylic resin layer to enhance the fins' resistance to acid rain and salt corrosion. A hydrophilic film layer also prevents rust caused by the run off of water droplets.

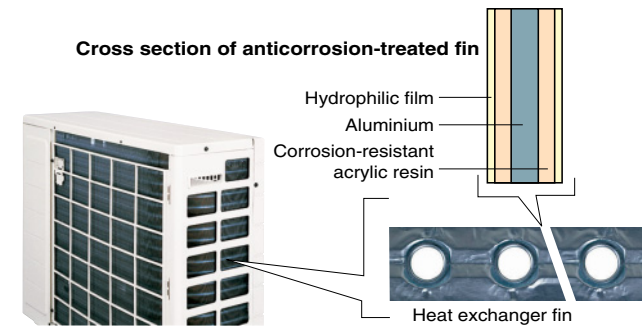

Wide Operation Range

With the heat pump type, cooling operation is possible even during outdoor temperatures of as low as 10°C. Heating operation can also be performed during outdoor temperatures of -15 to 18°C. This makes these units ideal for even very cold areas.

Heat pump FTXD50/60/71H

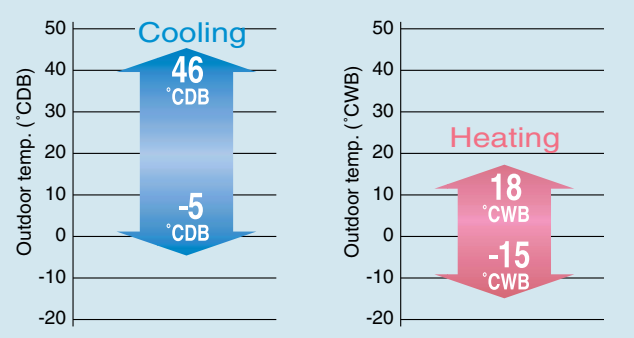

Installation Flexibility

A long piping length gives installation flexibility. Installation is possible even if there is no space for the outdoor unit near the indoor unit.

	Max. piping length	Max. height difference
FTKS25/35E FTXS25/35E FTXD25/35H	20 m	15 m
FTKD25/35/42H	25 m	
FTKS50/60/71F FTXS50/60/71F FTKD50/60/71H FTXD50/60/71H	30 m	20 m



Piping connections for the outdoor unit are covered to make them less conspicuous.

Comfortable Airflow



Power-Airflow Dual Flaps
Power-Airflow Dual Flaps can flatten out during cooling operation to deliver cool air to the corners of a room. The flaps can direct warm air straight down to the floor during heating operation.
► See page 9



Wide-Angle Louvers
The smoothly curved Wide-Angle Louvers provide wide airflow coverage for effective operation no matter where the indoor unit is placed in a room.
► See page 9



Vertical Auto-Swing (up and down)
This function automatically moves the flaps up and down to distribute air across a room.
► See page 9



Horizontal Auto-Swing (left and right)
Horizontal Auto-Swing automatically moves the louvers to the left and right to cover a room with cool/warm air.
► See page 9



3-D Airflow
This function combines Vertical and Horizontal Auto-Swing to circulate a cloud of cool/warm air right to the corners of even large spaces. The flaps and louvers swing in turn.
► See page 9



Comfort Airflow Mode
This function prevents uncomfortable drafts from blowing directly on to the body. To prevent drafts, the flap moves upward during cooling operation and downward during heating operation.
► See page 9

Lifestyle Convenience



Econo Mode
This mode limits maximum running current and power consumption. This improves operating efficiency and also prevents circuit breakers from being overloaded.
► See page 7



Inverter Powerful Operation
This function is convenient for boosting cooling/heating performance for a 20-minute period both when you first turn on your air conditioner or want to quickly change the room temperature.
► See page 10



Home Leave Operation
Home Leave Operation continues operation to prevent a room from becoming too hot or cold, while you are sleeping or out of your home. Select any temperature from 18 to 32°C for cooling operation and 10 to 30°C for heating operation.
► See page 10



Indoor Unit On/Off Switch
The unit can be conveniently started manually in the event the wireless remote controller is misplaced or the wireless remote controller batteries are not charged.
► See page 10

Comfort Control



Indoor Unit Quiet Operation
Indoor unit operating sound pressure levels are decreased from the Low setting fan speed using the wireless remote controller.
► See page 8



Outdoor Unit Quiet Operation
Outdoor unit operating sound pressure levels are decreased from the rated operation sound using the wireless remote controller.
► See page 8



Intelligent Eye
Intelligent Eye with its infrared sensor automatically controls air conditioner operation according to human movement in a room. When there is no movement, it adjusts the temperature by $\pm 2^{\circ}\text{C}$ for energy savings.
► See page 7



Automatic Operation
This function automatically selects cooling or heating operation mode based on the room temperature at start-up. This function is available with the heat pump type.



Programme Dry Function
The computer chip works to rid the room of humidity while maintaining the most consistent temperature possible. It automatically controls the temperature and airflow rate.



Auto Fan Speed
The microprocessor automatically controls fan speed to adjust the room temperature to the set temperature.

Cleanliness



Titanium Apatite Photocatalytic Air-Purifying Filter
This filter contains the advanced photocatalytic material titanium apatite. While the filter's micron-level fibres trap dust, this photocatalyst adsorbs and decomposes bacteria. The filter can be used for up to 3 years with proper maintenance.
► See page 11



Mould-Proof Operation
Mould-Proof Operation automatically runs fan-only operation for 1 hour when cooling or dry operation is stopped. This airflow prevents the generation of mould and mould odours inside the indoor unit.
► See page 11



Wipe-Clean Flat Panel
The flat panel design can be cleaned with only the single pass of a cloth across its smooth surface. The flat panel can also be easily removed for more thorough cleaning.
► See page 11

Timers



24-Hour On/Off Timer
This timer can start or stop the air conditioner within a 24-hour period. It can be preset in 10-minute steps by pressing the On/Off timer button on the wireless remote controller. The On timer and Off timer can be used in combination.



Night Set Mode
Pressing the Off timer button automatically selects Night Set Mode. This function prevents excessive cooling or heating for a pleasant sleep. After 60 minutes, the room temperature is raised by 0.5°C for cooling operation or lowered by 2°C for heating operation.
► See page 10

Worry Free



Auto-Restart after Power Failure
The air conditioner memorises the settings for mode, airflow, temperature, etc., and automatically returns to them when power is restored after a power failure.



Self-Diagnosis with Digital Display
Malfunction codes are shown on the digital display panel of the wireless remote controller for fast and easy maintenance.



Anticorrosion Treatment of Outdoor Heat Exchanger Fins
The outdoor unit's heat exchanger fins are processed using a special anticorrosion treatment. The surface is covered with a thin acrylic resin layer to enhance the fins' resistance to acid rain and salt corrosion.
► See page 12































































































































































































Others




















Comfort Control
Quick Warming Function
During low outdoor temperatures, this function pre-heats the compressor to shorten the time required to discharge warm air.



Automatic Defrosting
Before starting heating operation, a sensor checks for frost in the outdoor unit and performs automatic defrosting if necessary so that only warm air is discharged.

These 2 functions are available with the heat pump type.

Function List

Indoor Unit		Models	R-410A Cooling Only FTKS series		R-410A Heat Pump FTXS series		R-22 Cooling Only FTKD series		R-22 Heat Pump FTXD series	
			 FTKS25/35E	 FTKS50/60/71F	 FTXS25/35E	 FTXS50/60/71F	 FTKD25/35H	 FTKD42/50/60/71H	 FTXD25/35H	 FTXD50/60/71H
Functions										
 DC Inverter										
 Comfortable Airflow	 Power-Airflow Dual Flaps									
	 Wide-Angle Louvers									
	 Vertical Auto-Swing (up and down)									
	 Horizontal Auto-Swing (left and right)									
	 3-D Airflow									
	 Comfort Airflow Mode									
 Comfort Control	 Indoor Unit Quiet Operation									
	 Intelligent Eye									
	 Automatic Operation									
	 Programme Dry Function									
	 Auto Fan Speed									
 Lifestyle Convenience	 Econo Mode									
	 Inverter Powerful Operation									
	 Home Leave Operation									
	 Indoor Unit On/Off Switch									
 Cleanliness	 Titanium Apatite Photocatalytic Air-Purifying Filter									
	 Mould-Proof Operation									
	 Wipe-Clean Flat Panel									
 Timers	 24-Hour On/Off Timer									
	 Night Set Mode									
 Worry Free	 Auto-Restart after Power Failure									
	 Self-Diagnosis with Digital Display									

Outdoor Unit		Models		RKS25/35EB	RKS50/60/71F	RXS25/35EB	RXS50/60/71F	RKD25/35H	RKD42/50/60/71H	RXD25/35H	RXD50/60/71H
Functions											
 Comfort Control	 Outdoor Unit Quiet Operation										
	 Anticorrosion Treatment of Outdoor Heat Exchanger Fins										

Note:  indicates a new capacity model.  indicates a new design model.

FTKS25/35E

Model name	Indoor unit		FTKS25EVMV		FTKS35EVMV	
	Outdoor unit		RKS25EBVMV		RKS35EBVMV	
Capacity	Rated (Min.-Max.)	kW	2.5 (1.2-3.0)		3.5 (1.2-3.8)	
		Btu/h	8,500 (4,100-10,200)		11,900 (4,100-12,950)	
Power supply			1 phase, 220-240 V/220-230 V, 50/60 Hz			
Running current	Rated	A	3.5		4.9	
Power consumption	Rated (Min.-Max.)	W	600 (300-800)		1,020 (300-1,200)	
COP	Rated	W/W	4.17		3.43	
Indoor unit			FTKS25EVMV		FTKS35EVMV	
Front panel colour			White			
Airflow rate (H)		m³/min (cfm)	8.7 (307)		8.9 (314)	
Fan speed			5 steps, quiet and automatic			
Sound pressure level (H/L/SL)		dB (A)	37/25/22		38/26/23	
Dimensions (H x W x D)		mm	283 x 800 x 195			
Machine weight		kg	9			
Outdoor unit			RKS25EBVMV		RKS35EBVMV	
Casing colour			Ivory white			
Compressor	Type		Hermetically sealed swing type			
	Motor output	W	600			
Refrigerant charge (R-410A)		kg	1.0			
Sound pressure level (H/SL)		dB (A)	46/43		47/44	
Dimensions (H x W x D)		mm	550 x 765 x 285			
Machine weight		kg	34			
Operation range		°CDB	10 to 46			
Piping connections	Liquid	mm	ø6.4			
	Gas		ø9.5			
	Drain		ø18.0			
Max. piping length		m	20			
Max. height difference			15			

Note: The above values are based on operation with a 220 V, 50 Hz power supply.

FTKS50/60/71F

Model name	Indoor unit		FTKS50FVMV		FTKS60FVMV		FTKS71FVMV	
	Outdoor unit		RKS50FVMV		RKS60FVMV		RKS71FVMV	
Capacity	Rated (Min.-Max.)	kW	5.0 (1.7-6.0)		6.0 (1.7-6.7)		7.1 (2.3-8.5)	
		Btu/h	17,100 (5,800-20,500)		20,500 (5,800-22,900)		24,200 (7,800-29,000)	
Power supply			1 phase, 220-240 V/220-230 V, 50/60 Hz					
Running current	Rated	A	7.2		9.2		10.8	
Power consumption	Rated (Min.-Max.)	W	1,550 (440-2,080)		1,980 (440-2,390)		2,360 (570-3,200)	
COP	Rated	W/W	3.23		3.03		3.01	
Indoor unit			FTKS50FVMV		FTKS60FVMV		FTKS71FVMV	
Front panel colour			White					
Airflow rate (H)		m³/min (cfm)	14.7 (519)		16.2 (572)		17.4 (614)	
Fan speed			5 steps, quiet and automatic					
Sound pressure level (H/L/SL)		dB (A)	44/35/32		45/36/33		46/37/34	
Dimensions (H x W x D)		mm	290 x 1,050 x 238					
Machine weight		kg	12					
Outdoor unit			RKS50FVMV		RKS60FVMV		RKS71FVMV	
Casing colour			Ivory white					
Compressor		Type	Hermetically sealed swing type					
		Motor output	W	1,100		1,920		
Refrigerant charge (R-410A)		kg	1.50				2.30	
Sound pressure level (H/SL)		dB (A)	47/44		49/46		52/49	
Dimensions (H x W x D)		mm	735 x 825 x 300				770 x 900 x 320	
Machine weight		kg	47				71	
Operation range		°CDB	10 to 46					
Piping connections	Liquid	mm			ø6.4			
	Gas		ø12.7		ø15.9			
	Drain							
Max. piping length		m	30					
Max. height difference			20					

Note: The above values are based on operation with a 220 V, 50 Hz power supply.

Measurement conditions
1. Cooling capacity is based on: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; piping length 7.5 m.
2. Sound pressure levels are based on the temperature conditions 1. above. These are anechoic conversion values. These values are normally somewhat higher during actual operation as a result of ambient conditions.

FTXS25/35E

Model name	Indoor unit			FTXS25EVMV		FTXS35EVMV	
	Outdoor unit			RXS25EBVMV		RXS35EBVMV	
Capacity	Cooling	Rated (Min.-Max.)	kW	2.5 (1.2-3.0)		3.5 (1.2-3.8)	
			Btu/h	8,500 (4,100-10,200)		11,900 (4,100-12,950)	
	Heating	Rated (Min.-Max.)	kW	3.4 (1.2-4.5)		4.0 (1.2-5.0)	
			Btu/h	11,600 (4,100-15,350)		13,600 (4,100-17,050)	
Power supply				1 phase, 220-240 V/220-230 V, 50/60 Hz			
Running current	Cooling	Rated	A	3.5		4.9	
	Heating			4.3		5.1	
Power consumption	Cooling	Rated (Min.-Max.)	W	600 (300-800)		1,020 (300-1,200)	
	Heating			830 (290-1,340)		1,080 (290-1,550)	
COP	Cooling	Rated	W/W	4.17		3.43	
	Heating			4.10		3.70	
Indoor unit				FTXS25EVMV		FTXS35EVMV	
Front panel colour				White			
Airflow rate (H)	Cooling		m³/min (cfm)	8.7 (307)		8.9 (314)	
	Heating			9.4 (332)		9.7 (342)	
Fan speed				5 steps, quiet and automatic			
Sound pressure level (H/L/SL)	Cooling		dB (A)	37/25/22		38/26/23	
	Heating			37/28/25		38/29/26	
Dimensions (H x W x D)			mm	283 x 800 x 195			
Machine weight			kg	9			
Outdoor unit				RXS25EBVMV		RXS35EBVMV	
Casing colour				Ivory white			
Compressor	Type			Hermetically sealed swing type			
	Motor output		W	600			
Refrigerant charge (R-410A)			kg	1.00			
Sound pressure level (H/SL)	Cooling		dB (A)	46/43		47/44	
	Heating			47/44		48/45	
Dimensions (H x W x D)			mm	550 x 765 x 285			
Machine weight			kg	34			
Operation range	Cooling		*CDB	10 to 46			
	Heating		*CWB	−15 to 20			
Piping connections	Liquid		mm	ø6.4			
	Gas			ø9.5			
	Drain			ø18.0			
Max. piping length			m	20			
Max. height difference				15			

Note: The above values are based on operation with a 220 V, 50 Hz power supply.

FTXS50/60/71F

Model name	Indoor unit			FTXS50FVMV	FTXS60FVMV	FTXS71FVMV
	Outdoor unit			RXS50FVMV	RXS60FVMV	RXS71FVMV
Capacity	Cooling	Rated (Min.-Max.)	kW	5.0 (1.7-6.0)	6.0 (1.7-6.7)	7.1 (2.3-8.5)
			Btu/h	17,100 (5,800-20,500)	20,500 (5,800-22,900)	24,200 (7,800-29,000)
	Heating	Rated (Min.-Max.)	kW	5.8 (1.7-7.7)	7.0 (1.7-8.0)	8.2 (2.3-10.0)
			Btu/h	19,800 (5,800-26,300)	23,900 (5,800-27,300)	28,000 (7,900-34,100)
Power supply				1 phase, 220-240 V/220-230 V, 50/60 Hz		
Running current	Cooling	Rated	A	7.2	9.2	10.8
	Heating			7.4	9.4	11.6
Power consumption	Cooling	Rated (Min.-Max.)	W	1,550 (440-2,080)	1,980 (440-2,390)	2,360 (570-3,200)
	Heating			1,600 (400-2,530)	2,040 (400-2,810)	2,520 (520-3,730)
COP	Cooling	Rated	W/W	3.23	3.03	3.01
	Heating			3.63	3.43	3.25
Indoor unit				FTXS50FVMV	FTXS60FVMV	FTXS71FVMV
Front panel colour				White		
Airflow rate (H)	Cooling	m³/min (cfm)		14.7 (519)	16.2 (572)	17.4 (614)
	Heating			16.2 (572)	17.4 (614)	21.5 (759)
Fan speed				5 steps, quiet and automatic		
Sound pressure level (H/L/SL)	Cooling	dB (A)		44/35/32	45/36/33	46/37/34
	Heating			42/33/30	44/35/32	46/37/34
Dimensions (H x W x D)			mm	290 x 1,050 x 238		
Machine weight			kg	12		
Outdoor unit				RXS50FVMV	RXS60FVMV	RXS71FVMV
Casing colour				Ivory white		
Compressor	Type			Hermetically sealed swing type		
	Motor output		W	1,100		1,920
Refrigerant charge (R-410A)			kg	1.50		2.30
Sound pressure level (H/SL)	Cooling	dB (A)		47/44	49/46	52/49
	Heating			48/45	49/46	52/49
Dimensions (H x W x D)			mm	735 x 825 x 300		770 x 900 x 320
Machine weight			kg	48		71
Operation range	Cooling	°CDB		10 to 46		
	Heating			°CWB	-15 to 18	
Piping connections	Liquid	mm		ø6.4		
	Gas			ø12.7		ø15.9
	Drain			ø18.0		
Max. piping length			m	30		
Max. height difference			m	20		

FTKD25/35H

Model name	Indoor unit		FTKD25HVMV		FTKD35HVMV	
	Outdoor unit		RKD25HVMV		RKD35HVMV	
Capacity	Rated (Min.-Max.)	kW	2.5 (1.2-3.2)		3.2 (1.4-4.0)	
		Btu/h	8,500 (4,050-10,900)		10,900 (4,750-13,650)	
Power supply			1 phase, 220-240 V/220-230 V, 50/60 Hz			
Running current	Rated	A	3.9		4.2	
Power consumption	Rated (Min.-Max.)	W	685 (294-1,100)		888 (301-1,429)	
COP	Rated	W/W	3.65		3.60	
Indoor unit			FTKD25HVMV		FTKD35HVMV	
Front panel colour			White			
Airflow rate (H)		m³/min (cfm)	8.9 (314)		9.0 (318)	
Fan speed			5 steps, quiet and automatic			
Sound pressure level (H/L/SL)		dB (A)	37/28/25		39/29/26	
Dimensions (H x W x D)		mm	283 x 800 x 195			
Machine weight		kg	9			
Outdoor unit			RKD25HVMV		RKD35HVMV	
Casing colour			Ivory white			
Compressor	Type		Hermetically sealed swing type			
	Motor output	W	600			
Refrigerant charge (R-22)		kg	0.75		0.90	
Sound pressure level (H/SL)		dB (A)	46/43		47/44	
Dimensions (H x W x D)		mm	550 x 765 x 285			
Machine weight		kg	32		34	
Operation range		°CDB	19.4 to 46			
Piping connections	Liquid	mm	ø6.4			
	Gas		ø9.5		ø 12.7	
	Drain		ø18.0			
Max. piping length		m	25			
Max. height difference			15			

FTKD42/50/60/71H

Model name	Indoor unit		FTKD42HVMV	FTKD50HVMV	FTKD60HVMV	FTKD71HVMV
	Outdoor unit		RKD42HVMV	RKD50HVMV	RKD60HVMV	RKD71HVMV
Capacity	Rated (Min.-Max.)	kW	4.2 (2.0-5.0)	5.2 (1.5-5.9)	6.2 (1.5-6.5)	7.1 (2.1-7.6)
		Btu/h	14,300 (6,800-17,100)	17,700 (5,100-20,100)	21,200 (5,100-22,200)	24,200 (7,200-25,900)
Power supply			1 phase, 220-240 V/220-230 V, 50/60 Hz			
Running current	Rated	A	5.4	7.3	9.2	11.5
Power consumption	Rated (Min.-Max.)	W	1,167 (520-1,600)	1,575 (420-2,300)	2,000 (440-2,600)	2,491 (540-3,176)
COP	Rated	W/W	3.60	3.30	3.10	2.85
Indoor unit			FTKD42HVMV	FTKD50HVMV	FTKD60HVMV	FTKD71HVMV
Front panel colour			White			
Airflow rate (H)		m³/min (cfm)	15.3 (540)	17.5 (618)		18.3 (646)
Fan speed			5 steps, quiet and automatic			
Sound pressure level (H/L/SL)		dB (A)	42/36/33	44/35/32	45/36/33	46/37/34
Dimensions (H x W x D)		mm	290 x 1,050 x 250			
Machine weight		kg	12			
Outdoor unit			RKD42HVMV	RKD50HVMV	RKD60HVMV	RKD71HVMV
Casing colour			Ivory white			
Compressor	Type		Hermetically sealed swing type			
	Motor output	W	600	1,500		1,900
Refrigerant charge (R-22)		kg	1.10	1.00	1.50	1.60
Sound pressure level (H/SL)		dB (A)	49/44	49/44	50/46	53/49
Dimensions (H x W x D)		mm	550 x 765 x 285	735 x 825 x 300		
Machine weight		kg	35	43	47	53
Operation range		°CDB	19.4 to 46			
Piping connections	Liquid	mm	ø 6.4		ø9.5	
	Gas		ø 12.7		ø 15.9	
	Drain		ø18.0			
Max. piping length		m	25	30		
Max. height difference			15	20		

Measurement conditions
1. Cooling capacity is based on: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; piping length 7.5 m.
2. Sound pressure levels are based on the temperature condition 1. above. These are anechoic values. These values are normally somewhat higher during actual operation as a result of ambient conditions.

FTXD25/35H

Model name	Indoor unit			FTXD25HVMV		FTXD35HVMV	
	Outdoor unit			RXD25HVMV		RXD35HVMV	
Capacity	Cooling	Rated	kW	2.5 (1.3-3.0)		3.5 (1.4-3.8)	
		(Min.-Max.)	Btu/h	8,500 (4,400-10,200)		11,900 (4,750-12,950)	
	Heating	Rated	kW	3.4 (1.3-4.0)		4.2 (1.4-5.0)	
		(Min.-Max.)	Btu/h	11,600 (4,400-13,650)		14,300 (4,750-17,050)	
Power supply				1 phase, 220-240 V/220-230 V, 50/60 Hz			
Running current	Cooling	Rated	A	4.2		5.4	
	Heating			5.1		6.2	
Power consumption	Cooling	Rated	W	725 (310-1,030)		1,130 (305-1,370)	
	Heating			(Min.-Max.) 1,000 (310-1,220)		1,310 (330-1,580)	
COP	Cooling	Rated	W/W	3.45		3.10	
	Heating			3.40		3.21	
Indoor unit				FTXD25HVMV		FTXD35HVMV	
Front panel colour				White			
Airflow rate (H)	Cooling		m³/min (cfm)	8.9 (314)		9.0 (318)	
	Heating			9.4 (332)		9.7 (342)	
Fan speed				5 steps, quiet and automatic			
Sound pressure level (H/L/SL)	Cooling		dB (A)	37/28/25		38/29/26	
	Heating			37/28/25		38/29/26	
Dimensions (H x W x D)			mm	283 x 800 x 195			
Machine weight			kg	9			
Outdoor unit				RXD25HVMV		RXD35HVMV	
Casing colour				Ivory white			
Compressor	Type			Hermetically sealed swing type			
	Motor output		W	600			
Refrigerant charge (R-22)			kg	0.90		1.20	
Sound pressure level (H/SL)	Cooling		dB (A)	46/43		47/44	
	Heating			47/44		48/45	
Dimensions (H x W x D)			mm	550 x 765 x 285			
Machine weight			kg	31		33	
Operation range	Cooling		°CDB	10 to 46			
	Heating			-10 to 20			
Piping connections	Liquid	mm	ø 6.4				
	Gas		ø 9.5		ø 12.7		
	Drain		ø 18.0				
Max. piping length			m	20			
Max. height difference				15			


Note: The above values are based on operation with a 220 V, 50 Hz power supply.

FTXD50/60/71H

Model name	Indoor unit			FTXD50HVMV	FTXD60HVMV	FTXD71HVMV
	Outdoor unit			RXD50HVMV	RXD60HVMV	RXD71HVMV
Capacity	Cooling	Rated	kW	5.2 (1.5-5.9)	6.2 (2.2-7.6)	7.1 (2.9-8.0)
		(Min.-Max.)	Btu/h	17,700 (5,100-20,100)	21,200 (7,500-25,900)	24,200 (9,900-27,300)
	Heating	Rated	kW	6.5 (1.5-8.0)	7.2 (2.2-9.0)	8.5 (2.9-9.7)
		(Min.-Max.)	Btu/h	22,200 (5,100-27,300)	24,600 (7,500-30,700)	29,000 (9,900-33,100)
Power supply				1 phase, 220-240 V/220-230 V, 50/60 Hz		
Running current	Cooling	Rated	A	7.4	9.6	11.9
	Heating			8.5	9.7	11.8
Power consumption	Cooling	Rated	W	1,600 (450-2,300)	2,100 (630-3,210)	2,600 (720-3,350)
	Heating			(Min.-Max.)	1,840 (410-2,800)	2,120 (570-3,230)
COP	Cooling	Rated	W/W	3.25	2.95	2.73
	Heating			3.53	3.40	3.29
Indoor unit				FTXD50HVMV	FTXD60HVMV	FTXD71HVMV
Front panel colour				White		
Airflow rate (H)	Cooling		m³/min (cfm)	16.8 (593)	17.5 (618)	18.3 (646)
	Heating			17.5 (618)	18.7 (660)	19.8 (699)
Fan speed				5 steps, quiet and automatic		
Sound pressure level (H/L/SL)	Cooling		dB (A)	44/35/32	45/36/33	46/37/34
	Heating			42/33/30	44/35/32	46/37/34
Dimensions (H x W x D)			mm	290 x 1,050 x 238		
Machine weight			kg	12		
Outdoor unit				RXD50HVMV	RXD60HVMV	RXD71HVMV
Casing colour				Ivory white		
Compressor	Type			Hermetically sealed swing type		
	Motor output		W	1,500		1,900
Refrigerant charge (R-22)			kg	1.25	1.80	
Sound pressure level (H/SL)	Cooling		dB (A)	47/44	49/46	52/49
	Heating			48/45	49/46	52/49
Dimensions (H x W x D)			mm	735 x 825 x 300		
Machine weight			kg	49	55	57
Operation range	Cooling		°CDB °CWB	-5 to 46		
	Heating			-15 to 18		
Piping connections	Liquid		mm	ø 6.4		ø 9.5
	Gas			ø12.7		ø15.9
	Drain			ø18.0		
Max. piping length			m	30		
Max. height difference				20		


Controller

Wireless Remote Controller FTKS25/35E, FTXS25/35E, FTKD25/35H and FTXD25/35H

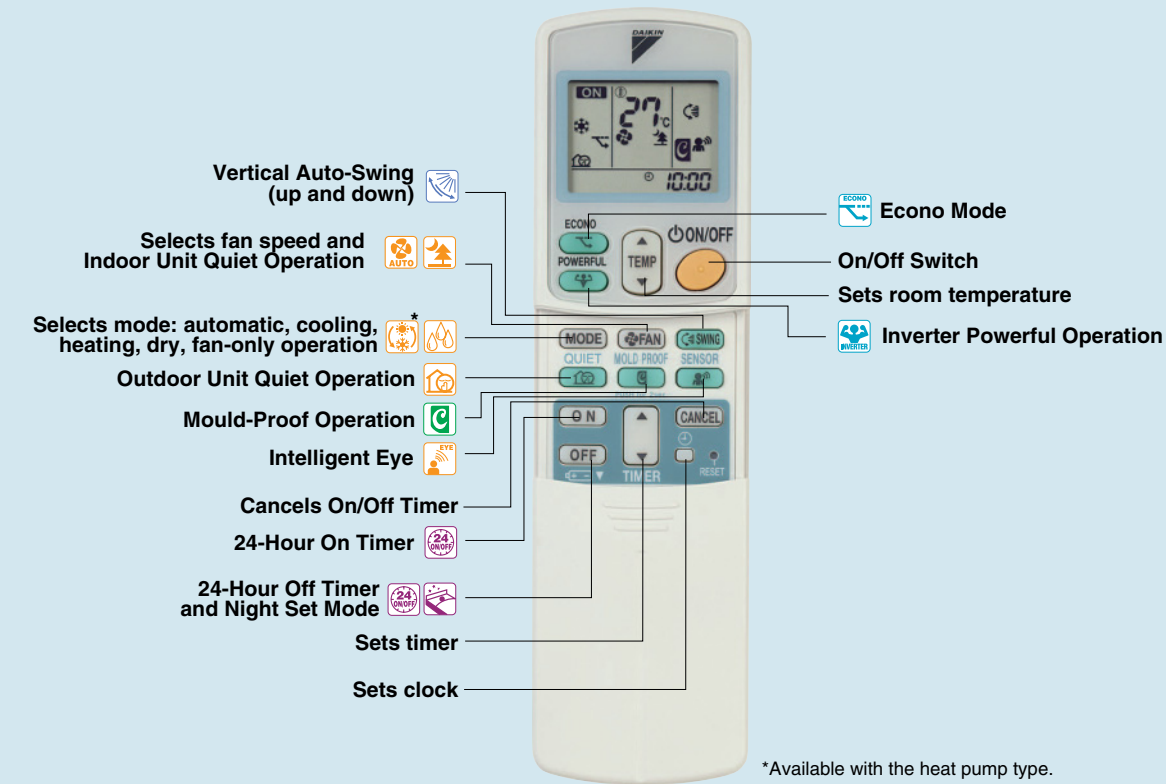


Controller

Wireless Remote Controller FTKD42/50/60/71H

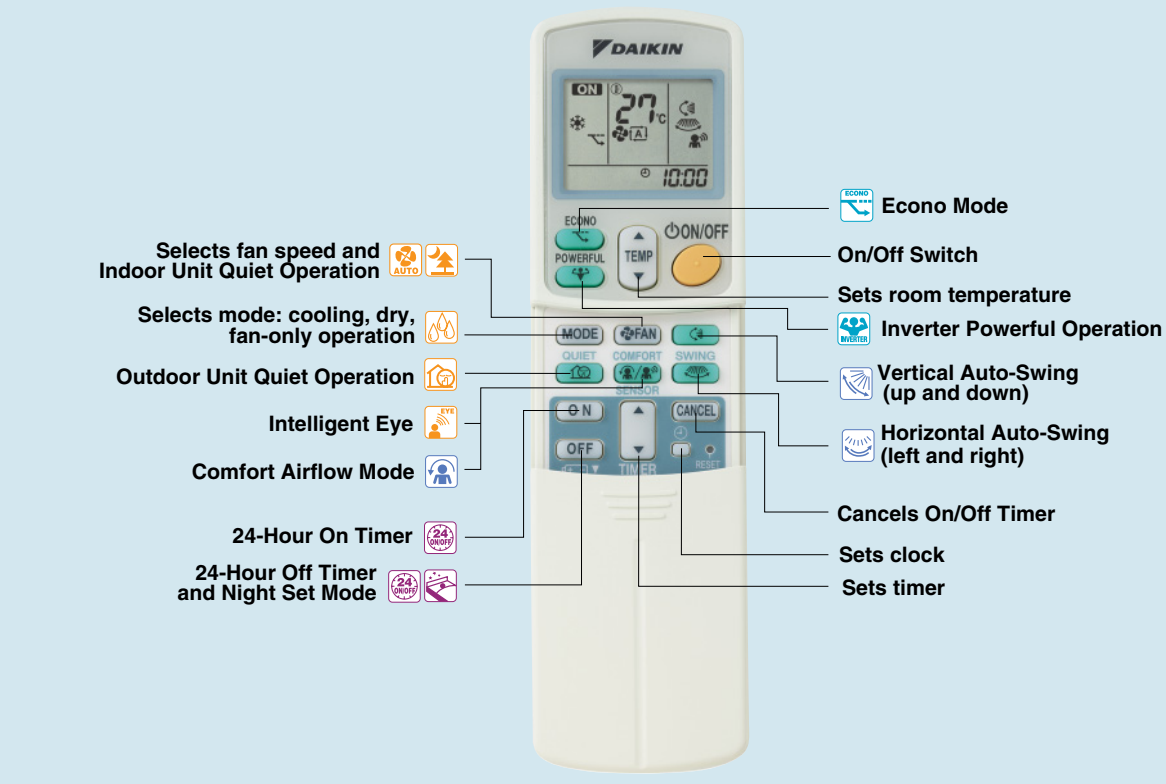

Wireless Remote Controller FTKS50/60/71F, FTXS50/60/71F and FTXD50/60/71H

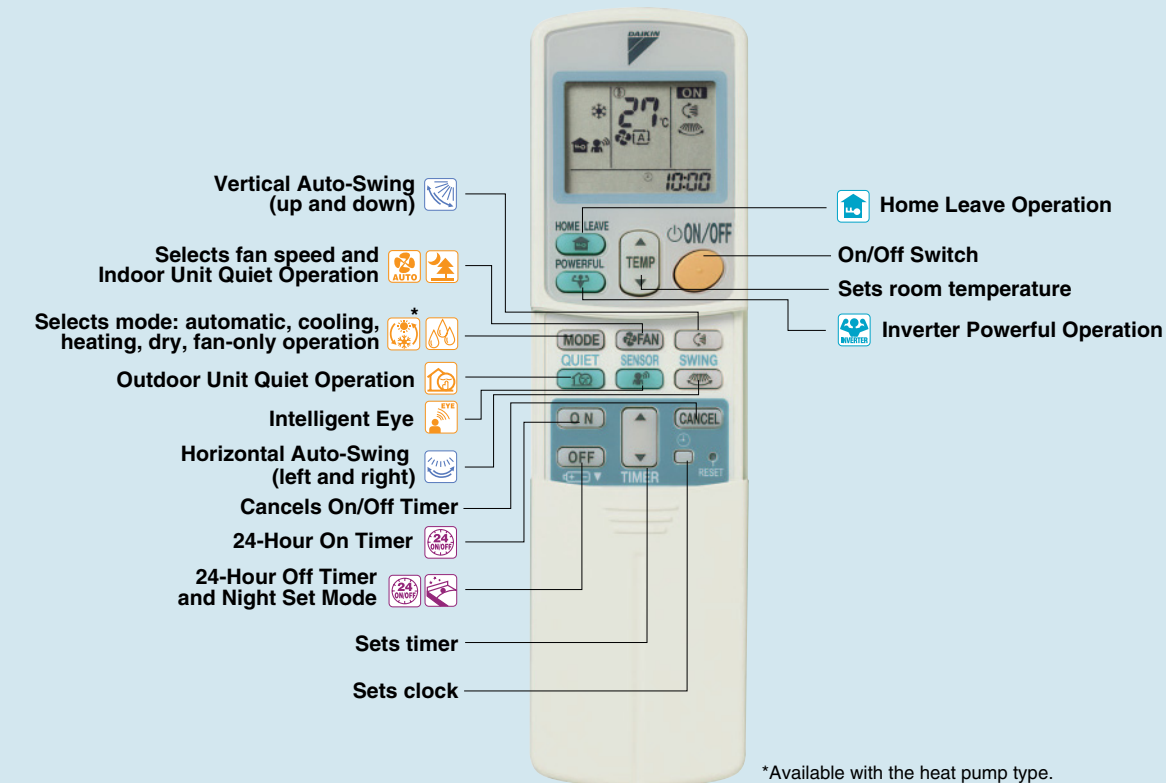

Options

Indoor unit

No.	Item	FTK(X)S25/35E	FTK(X)S50/60/71F	FTK(X)D25/35H	FTKD42H, FTK(X)D50/60/71H
1	5-room centralised controller *1	KRC72			
2	Wiring adaptor for time clock/remote controller (Normal open pulse contact/normal open contact) *2	KRP413AB1S			
3	Titanium apatite photocatalytic air-purifying filter *3	KAF970A46	KAF952B42	KAF970A46	KAF971A42
4	Remote controller loss prevention with chain	KKF917A4			

Notes: *1. A wiring adaptor (KRP413AB1S) is also required for each indoor unit.
*2. The time clock and other devices should be obtained locally.
*3. The filter is a standard accessory. It should be replaced approximately every 3 years.

Outdoor unit

No.	Item	RK(X)S25/35EB	RK(X)S50/60F	RK(X)S71F	RKD25/35/42H	RXD25/35H	RKD50/60/71H	RXD50/60/71H
1	Air direction adjustment grille	KPW937A4	KPW945A4		KPW937A4		KPW945A4	
2	Drain plug	KKP937A4 *		KKP945A4	KKP937A4 *			

Note: *1. One set includes 5 pieces for 5 units.

Control system

No.	Item	FTK(X)S-E/F, FTKD-H and FTXD-H
1	Central remote controller *1	DCS302CA61
2	Unified On/Off controller *1	DCS301BA61
3	Schedule timer *1	DST301BA61
4	Interface adaptor for DIII-NET use	KRP928BB2S

Note: *1. Interface adaptor for DIII-NET use (KRP928BB2S) is also required for each indoor unit.

Specifications are subject to change.